XCMG | SOLID TO SUCCEED

ROUGH TERRAIN SCISSOR LIFTS XG2225RT



The print does not belong to the contract, nor a part of the vehicle purchase contract. We reserve the right to revise the product model, paramenters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product.


XG2225RT


Rough terrain scissor lifts

FEATURES

PRODUCTIVITY

4 driving wheels
4 steering wheels
40% theoretical gradeability
Outrigger leveling system
Both platform and ground control panel with emergency stop button
Solid rough terrain tires
Tilt alarm
Lift and lower alarm
Horn
Dual flashing beacons
Drive alarm
Overload alarm

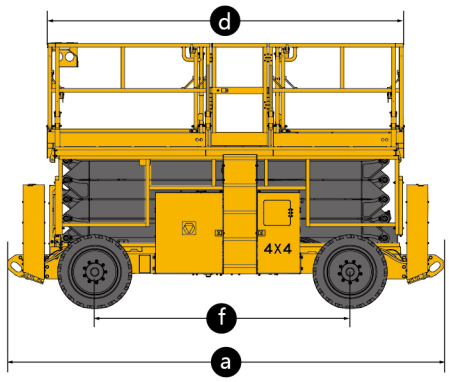

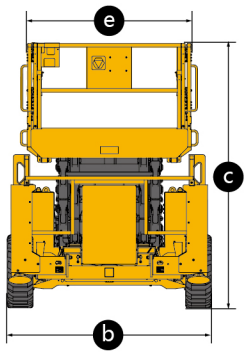

POWER

12V DC emergency power
Euro stage V emission

OPTIONS

Platform working light

Item	Unit	XG2225RT
Lift capacity	kg	750
Lift capacity of auxiliary platform	kg	750
Occupant Capacity(indoor/outdor)	-	4/4
Working height	m	22
Platform height	m	20
Length of auxiliary platform	mm	2700
Length of platform(main & sub platform)	mm	7290
Ground clearance	mm	400
Turning radius(inside/outside)	m	1.5/3.5
Drive Speed (retracted/extended)	km/h	5/0.4
Lift/Lower time	s	75/60
Gradeability	%	40
Tilt alarm(side/forward and backward)	°	2/3
Power source	-	Kubota
Rated power	KW/(r/min)	36.4/2600
Tires	-	36×14-20
Fuel tank	L	100
Hydraulic tank	L	150
Weight	kg	13000
a Length	mm	4950
b Width	mm	2500
c Height(platform folded)	mm	3860/3000
d × e Platform size (Length × Width)	mm	4590×2250
f Wheelbase	mm	3300

The print does not belong to the contract, nor a part of the vehicle purchase contract. We reserve the right to revise the product model, paramenters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product.