XCMG | SOLID TO SUCCEED

SCISSOR LIFT

XG0807AEW



The print does not belong to the contract, nor a part of the vehicle purchase contract. We reserve the right to revise the product model, paramenters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product.


XG0807AEW

Scissor lift

FEATURES

PRODUCTIVITY

2 front driving wheels
25% theoretical gradeability
Battery charge indicator and diagnostic display
Manual platform lowering value
Both platform and ground control panel with emergency stop button
Front wheel multi-disc brakes
Manual brake release
Solid non-marking tires
Mobile pothole protection
Tilt alarm
Hourmeter record
Lift and lower alarm
Horn
Dual flashing beacons
Drive alarm
Overload alarm

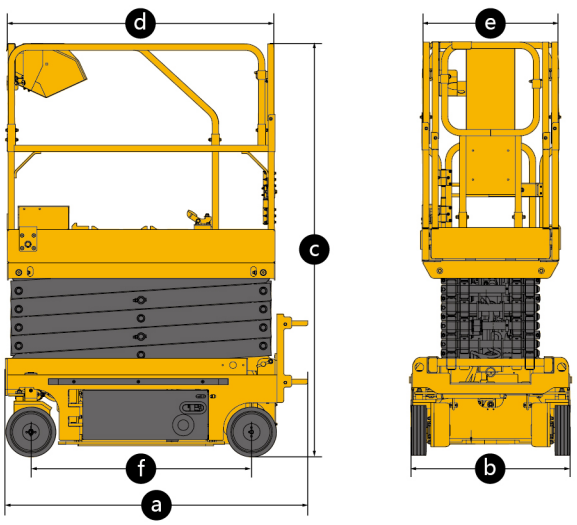

OPTIONS

Platform working light
Air-line to platform
AC power to the platform

Item	Unit	XG0807AEW
Lift capacity	kg	280
Lift capacity of auxiliary platform	kg	115
Occupant capacity	-	2
Working height	m	7.8
Platform height	m	5.8
Length of auxiliary platform	mm	900
Ground clearance (pothole protector – raised/lowered)	mm	65/20
Turning radius (inside/outside)	m	0.02/1.75
Drive motor	kW	0.5
Lift motor	kW	1.4
Drive speed (retracted/extended)	km/h	4.0/0.8
Lift/Lower time	s	13~30/30~45
Gradeability	%	25
Tilt alarm (side/forward and backward)	°	1.5/3.5
Batteries	V/Ah	2×12/75
Charger	V/A	24/30
Tires	-	323×100
Weight	kg	1600
a Length (without ladder)	mm	1900(1680)
b Width	mm	810
c Height (platform folded)	mm	2160(1830)
d x e Platform size (Length x Width)	mm	1670×740
f Wheelbase	mm	1360

The print does not belong to the contract, nor a part of the vehicle purchase contract. We reserve the right to revise the product model, paramenters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product.